

BORDER 600



راه بند 24V
با حداکثر طول بازوی 6 متر



پایه فونداسیون



فنر



پایه ثابت نگهدارنده بازو



فلاشر



باتری پشتیبان



پایه متحرک نگهدارنده بازو




ریموت کنترل



متعلقات بازو مفصلی 90 درجه


TECHNICAL CHARACTERISTICS

<i>Electrical information</i>		24V
<i>Power supply</i>	منبع تغذیه اصلی اپراتور	230 VAC
<i>Operating power supply</i>	منبع تغذیه موتور	24 VDC
<i>Power consumption</i>	توان	150 W
<i>Current input</i>	جریان کارکرد	6,2 A
<i>Torque</i>	گشاور خروجی	100 Nm
<i>Duty cycle</i>	تعداد عملکرد در روز	<i>intensive use</i> نامحدود
<i>Protection rating (IP)</i>	درجه حفاظت	IP24D
<i>Working temperature</i>	محدوده در حرارت کارکرد اپراتور	-20°C / +50°C

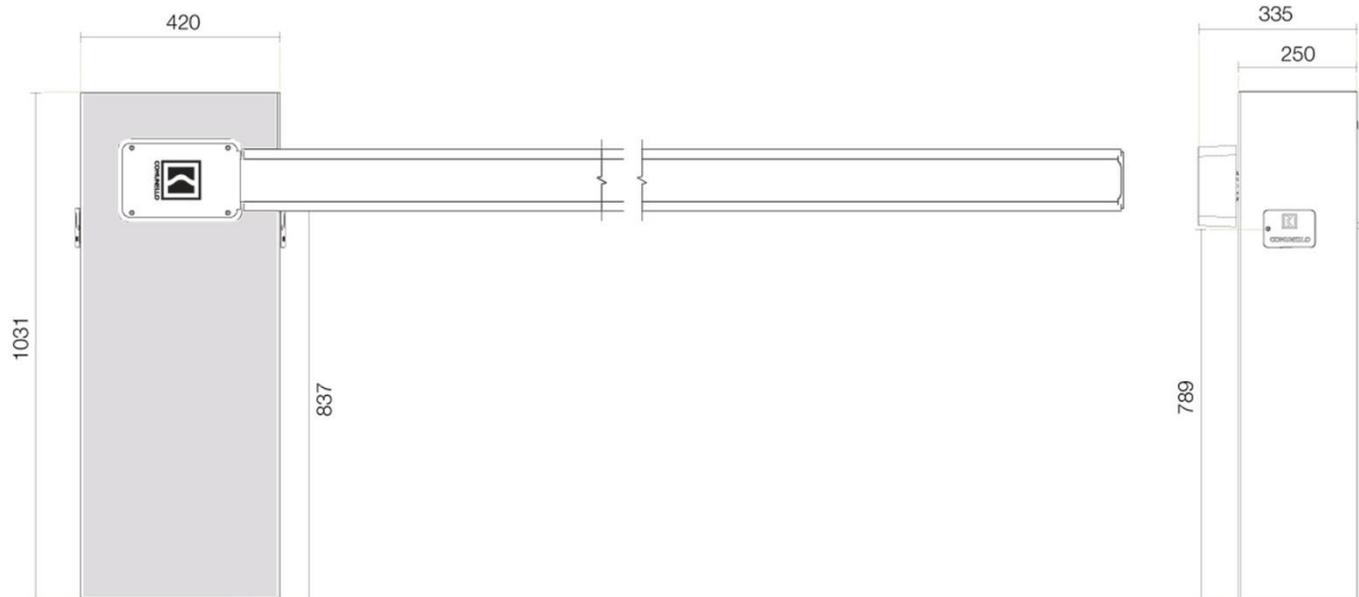


Protection Against Solid Objects First Digit


0. No Protection.



1. Protected against solid objects over 50mm, e.g. accidental touch by hands.




2. Protected against solid objects over 12mm, e.g. fingers.



3. Protected against solid objects over 2.5mm, e.g. tools and wires.




4. Protected against solid objects over 1.0 mm, e.g. tools and small wires.



5. Protected against dust - limited ingress (no harmful deposits).




6. Totally protected against dust.




Protection Against Liquids Second Digit


0. No Protection.




1. Protected against vertically falling drops of water, e.g. condensation.




2. Protected against direct sprays of water up to 15° from the vertical.



3. Protected against sprays of water up to 60° from the vertical.




4. Protected against water sprayed from all directions - limited ingress.




5. Protected against low pressure jets of water from all directions - limited ingress permitted.




6. Protected against strong jets of water, e.g. for use on ship decks.



7. Protected against the effect of immersion between 15cm and 1.0 m.



8 Protected against long periods of immersion under pressure.




Protection Against Mechanical Impact Additional letter


A. Protection against access with the back of a hand.



B. Protection against access with a finger.




C. Protection against access with a tool of 2.5mm or larger and up to 100mm long.



D. Protection against access of a Wire of 1mm dia or larger and up to 100mm long.



(IP24D)

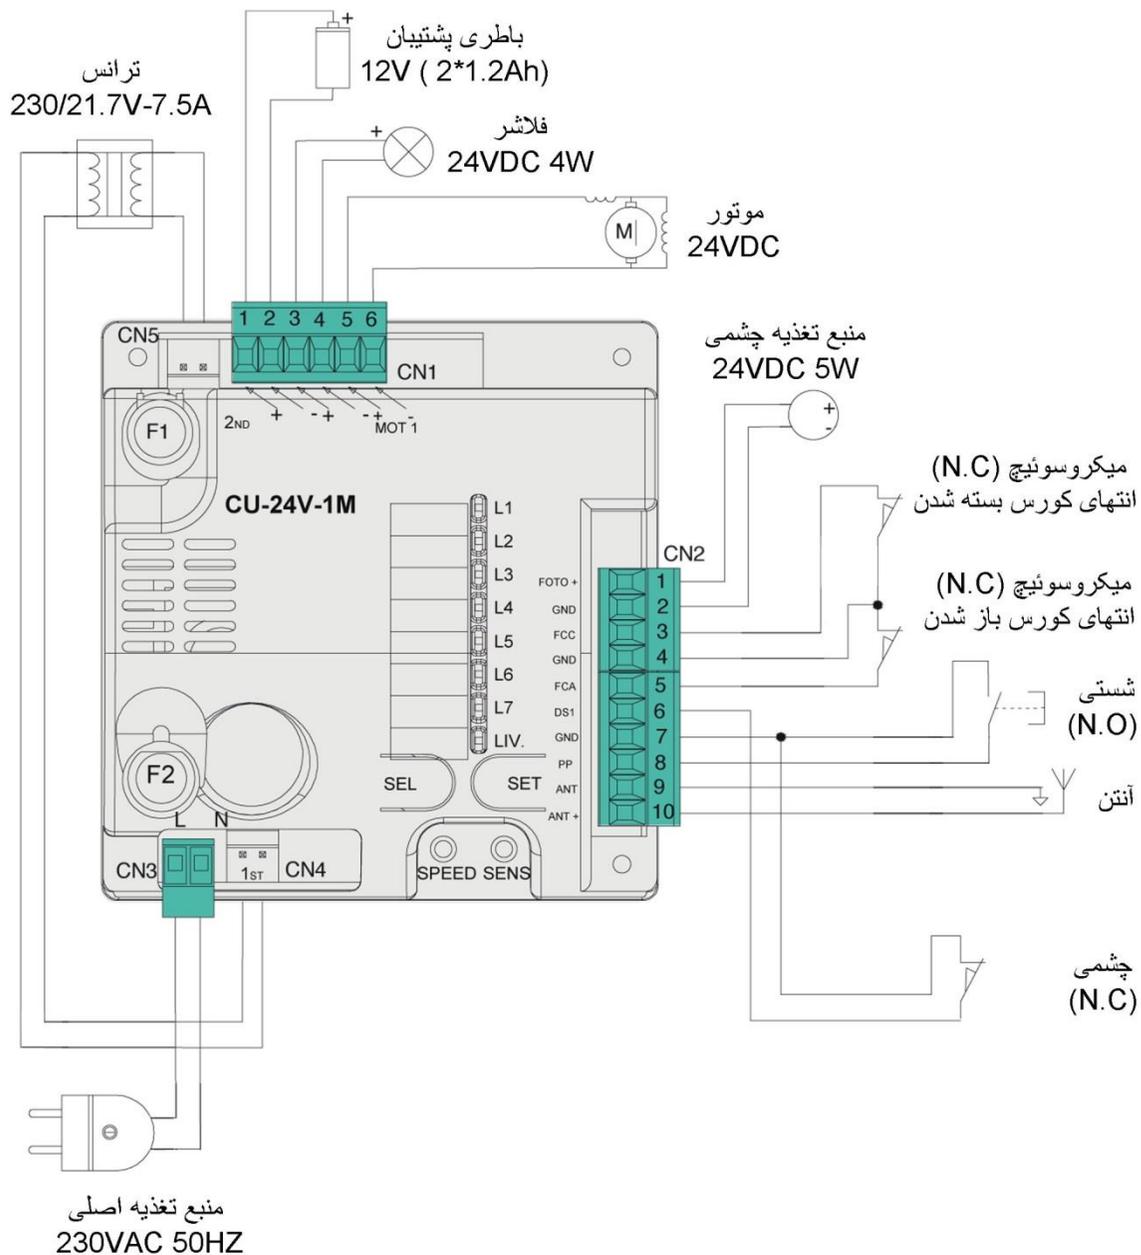

تابلو فرمان CU 24V - BR

- برنامه ریزی تابلو فرمان توسط شستی های SET / SELECT

- مجهز به سنسور تشخیص مانع (معکوس شدن حرکت در برخورد با مانع)

- قابلیت تنظیم حساسیت برخورد با مانع توسط تریمر

- قابلیت تنظیم محدوده سرعت آهسته

- قابلیت تنظیم قدرت موتور توسط تریمر

- قابلیت نصب شستی با فرمان OPEN/CLOSE

- قابلیت بسته شدن سریع بازو پس از عبور وسیله نقلیه از بین چشمی (fast close)

- قابلیت تست عملکردی چشمی ها قبل از هر بار باز شدن

- قابلیت نصب باتری پشتیبان (BACK - UP)

- ظرفیت حافظه کارت گیرنده : 120 ریموت