

RAMPART





TECHNICAL CHARACTERISTICS

Electrical information

RAMPART 1000

Power supply	منبع تغذیه اصلی اپراتور	230 VAC
Operating power supply	ولتاژ کارکرد موتور	24 VDC
Power consumption	توان موتور	150 W
Maximum thrust	حداکثر نیروی خروجی اپراتور	1000 N
Duty cycle	تعداد عملکرد در روز	intensive use نامحدود
Protection rating (IP)	درجه حفاظت	IP20
Working temperature	درجه حرارت کارکرد اپراتور	-10°C / +55°C
Speed	سرعت باز شدن درب	100 mm/sec
Weight	وزن اپراتور	10,5 Kg

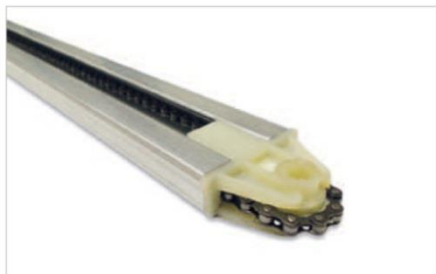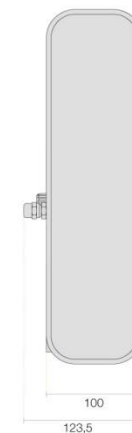

3,25 m one-piece chain ریل یک تکه




Support bracket kit براق نصب ریل



Protection Against Solid Objects First Digit

0. No Protection.




1. Protected against solid objects over 50mm, e.g. accidental touch by hands.



2. Protected against solid objects over 12mm, e.g. fingers.




3. Protected against solid objects over 2.5mm, e.g. tools and wires.




4. Protected against solid objects over 1.0 mm, e.g. tools and small wires.



5. Protected against dust - limited ingress (no harmful deposits).




6. Totally protected against dust.




Protection Against Liquids Second Digit


0. No Protection.




1. Protected against vertically falling drops of water, e.g. condensation.




2. Protected against direct sprays of water up to 15° from the vertical.



3. Protected against sprays of water up to 60° from the vertical.



4. Protected against water sprayed from all directions - limited ingress.




5. Protected against low pressure jets of water from all directions - limited ingress permitted.



6. Protected against strong jets of water, e.g. for use on ship decks.



7. Protected against the effect of immersion between 15cm and 1.0 m.



8 Protected against long periods of immersion under pressure.



Protection Against Mechanical Impact Additional letter


A. Protection against access with the back of a hand.



B. Protection against access with a finger.



C. Protection against access with a tool of 2.5mm or larger and up to 100mm long.




D. Protection against access of a Wire of 1mm dia or larger and up to 100mm long.



(IP20)

تابلو فرمان CU 24V - RT

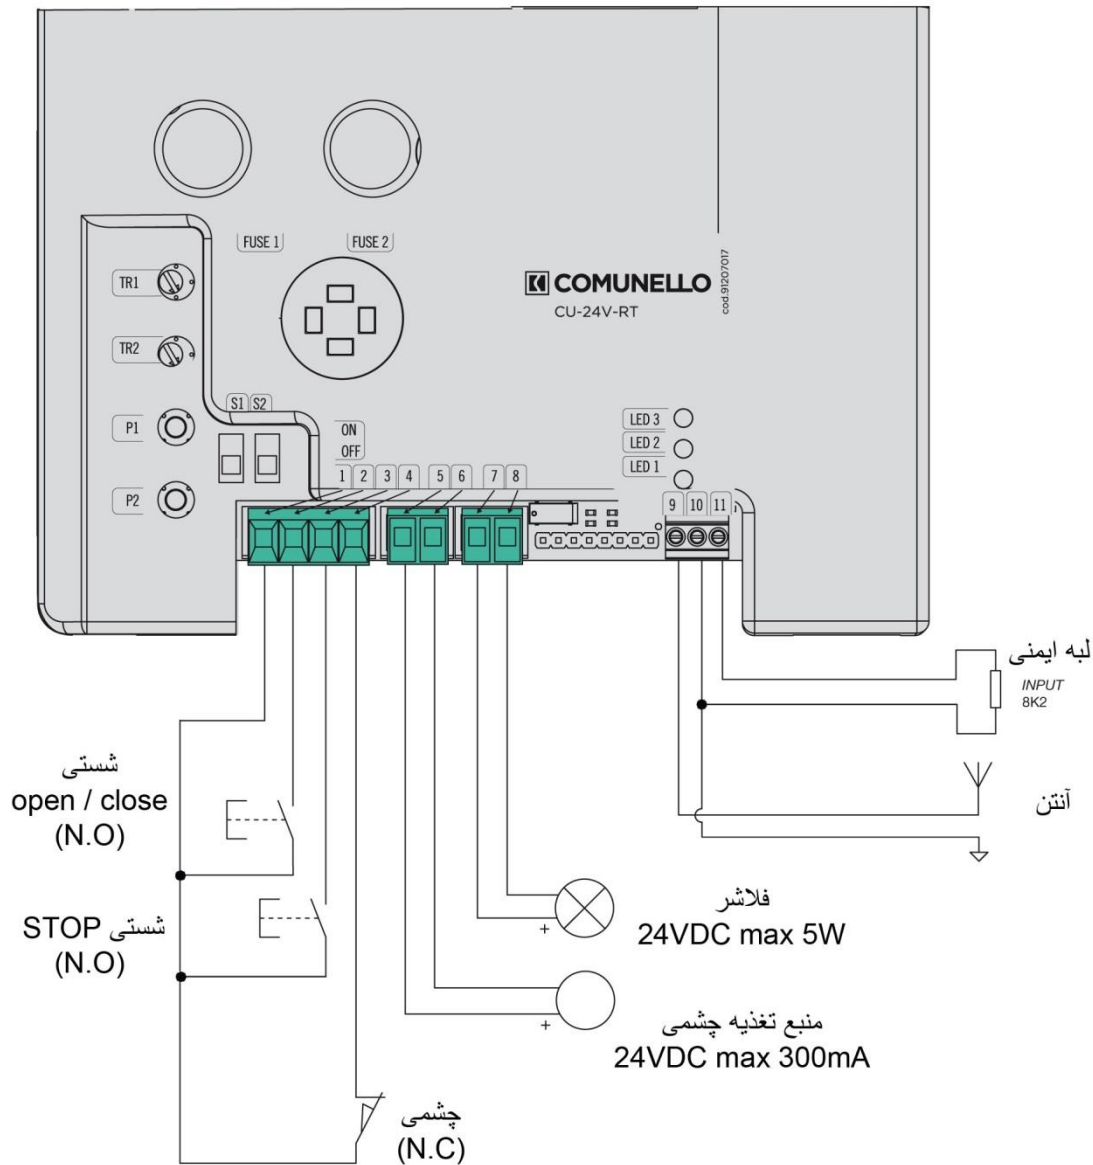

- مجهز به انکودر

- قابلیت تنظیم سرعت آهسته و قدرت موتور توسط تریمر

- قابلیت تشخیص مانع در مسیر حرکت درب و معکوس کردن حرکت

- قابلیت نصب شستی STOP

- قابلیت نصب شستی OPEN/CLOSE

- مجهز به چراغ روشنایی LED (تعبیه شده در داخل اپراتور)

- ظرفیت حافظه کارت گیرنده : 200 ریموت